



Ultraline Flat

In tiled roof

Rooflights

The Ultraline flat roof system offers two choices of design. The frameless border edge and the glass rafter.

Both are sleek, modern and give a truly contemporary frameless view from the inside, resulting in more natural light when compared to traditional rooflights.





They can be incorporated into both flat and pitched roofs and come in individual panel sizes up to 2400mm x 2400 mm, allowing a run of glazing to suit your bespoke specification.


Both are available in double or triple glazed with the new enhanced technology can boast an impressive U value of up to 0.5 w/m²k.




TILE ROOF APPLICATION

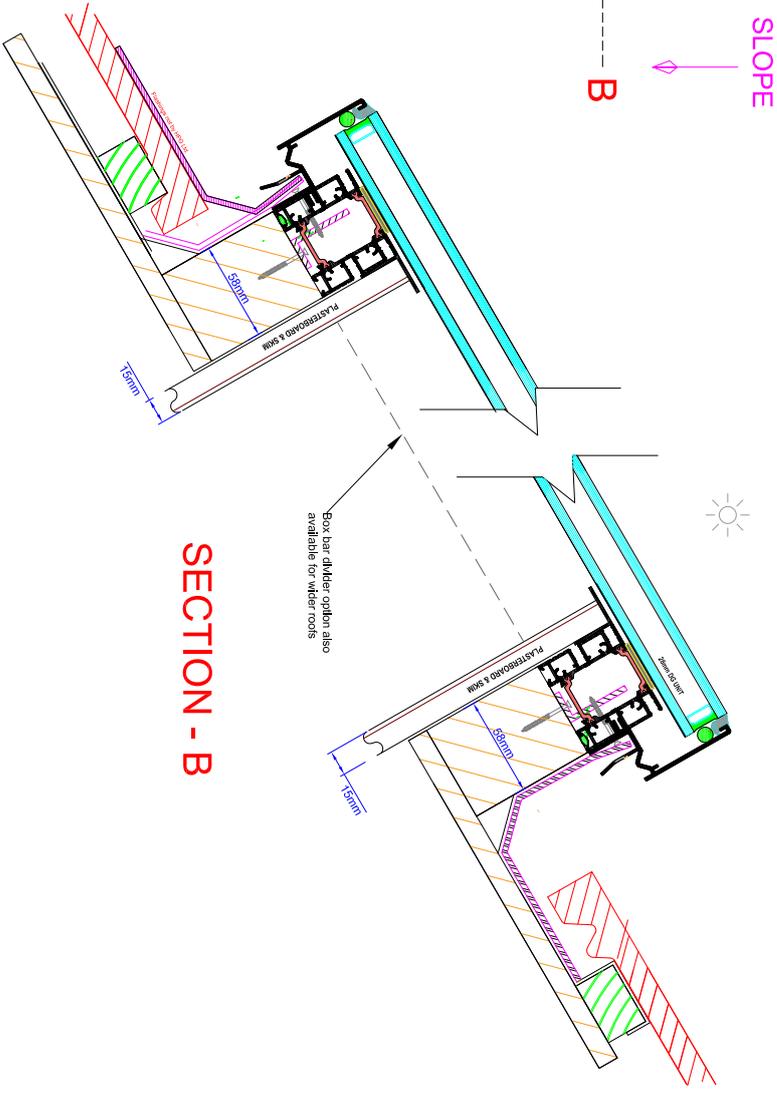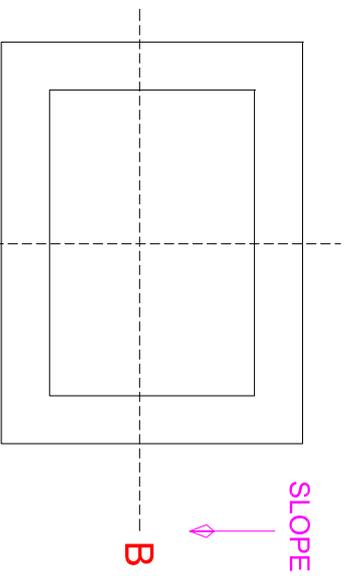

SECTION - B

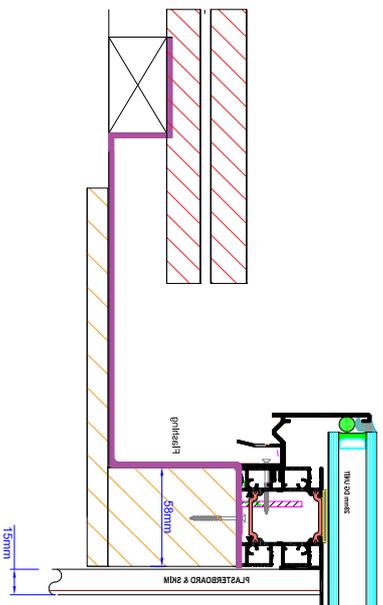

SECTION - A

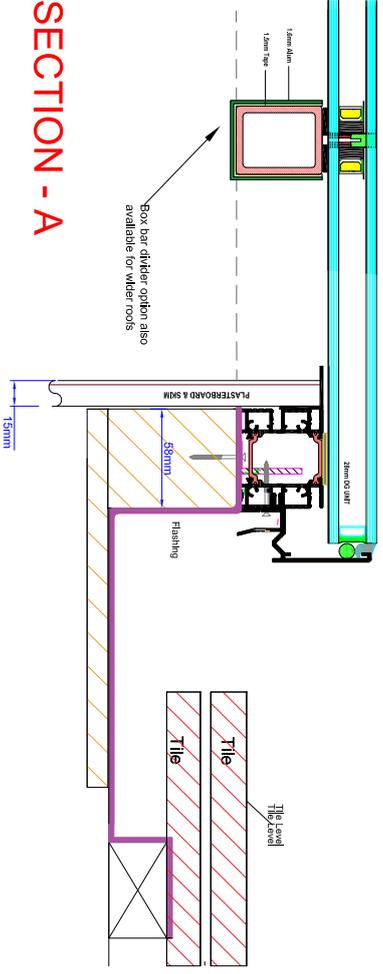

FINISH
POLYESTER POWDER COATED
FINISH REF lbc

GLASS SPECIFICATION
DG Unit
Toughened Outer
16mm Argon + Black WISS
Low E Toughened Inner
U VALUE 1.0 W/m²

CONSTRUCTION

DRAWING STATUS

CLIENT

PROJECT

STYLE 241

DRAWING TITLE

DRAWN: Gary SCALE: 1:1

CHECKED: DATE: 10/08/2021

CONTRACT No. GJH-0000 DRAWING No. 101 REV. A













