

# FLUSH CASEMENT WINDOW

## ALUK



## Features

SLIMLINE, FLUSH, FLAWLESS

### | **Slimmer Sightlines**


45 mm ultra-slim sash, suiting a range of property styles



### | **Advanced Weather Performance**

With features such as double rebate and friction stays.

### | **Improved Thermal Performance**

Offering a u-value of 1.4 W/m<sup>2</sup>K, and WER of B for higher energy efficiency.

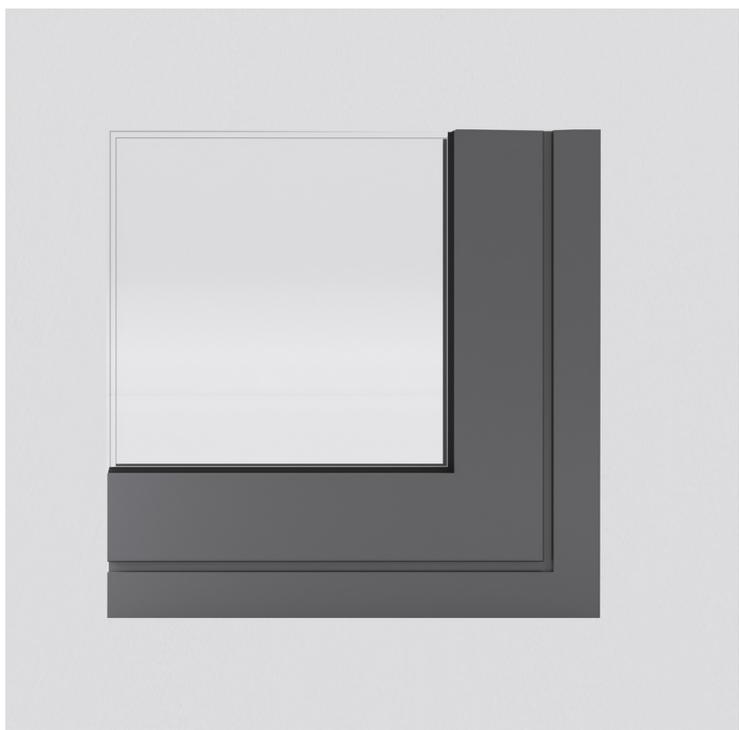

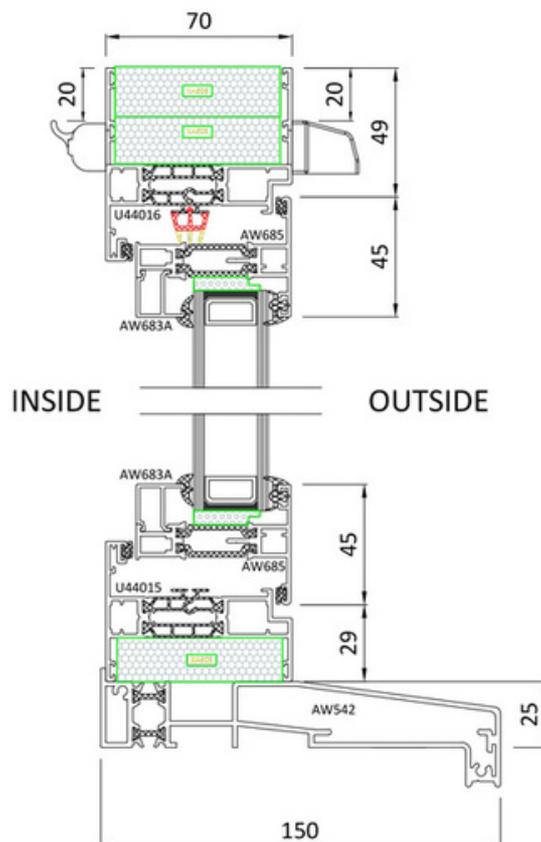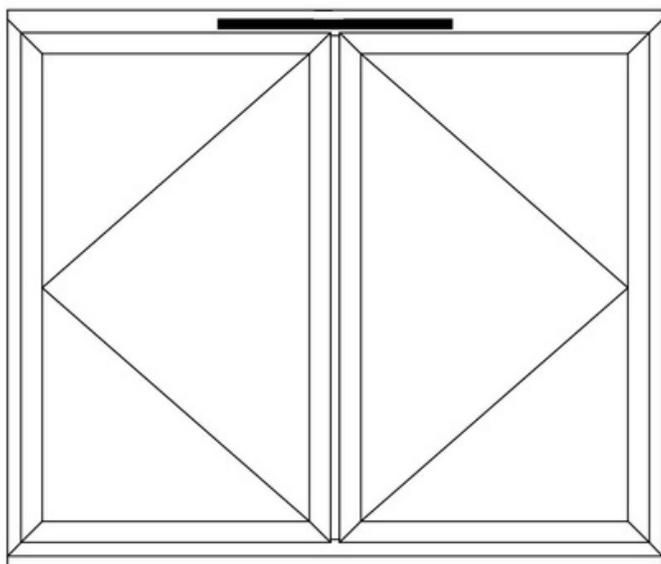

## Size & Weight Limits

### Top Hung

Max Size (mm) 1436w  
1336h

Max Weight 40 kg

Min Size (mm) 386w  
336h

### Side Hung

Max Size (mm) 736w  
1436h

Max Weight 24 kg

Min Size (mm) 336w  
386h

### Fixed Light

Max Size (mm) -

Max Weight 250 kg

Min Size (mm) -

## Aesthetics

- Putty Line ✓
- Stepped Edge ✓
- Flat ✓

## Performance

- U-value (Double Glazed) 1.4 W/m<sup>2</sup> K
- U-value (Triple Glazed) 1.2 W/m<sup>2</sup> K
- Window Energy Rating (WER) A - B
- Air Permeability Class 4 (600 Pa)
- Water Tightness Class E1500 (1500 Pa)
- Security PAS 24: 2016

## System Features

- Dual Colour ✓
- Textured Finish ✓
- Anodised Finish ✓
- Multi-point Locking ✓
- Frame Depth 58 & 70 mm
- Glazing Thickness 24 - 32 mm
- Sightline (frame to vent) 66 mm
- Sightline (vent to mullion) 81 mm
- Sightline (fixed light) 43 mm

## Configurations

- Top Hung ✓
- Side Hung ✓
- Fixed Light ✓
- Multi-light ✓
- French Casement ✓